


BV-2

DIN 24960



DIN 24960 (EN12756)

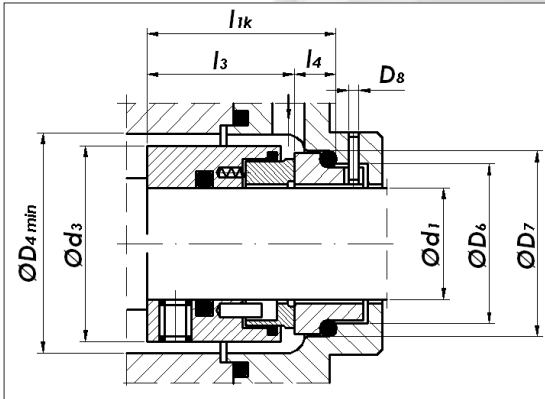

d_1	d_3	D_4	D_6	D_7	D_8	l_3	l_4	l_{1k}
18	32	34	27	33	3	30	7.5	37.5
20	34	36	29	35	3	30	7.5	37.5
22	36	38	31	37	3	30	7.5	37.5
24	38	40	33	39	3	32.5	7.5	40
25	39	41	34	40	3	32.5	7.5	40
28	42	44	37	43	3	34	8.5	42.5
30	44	46	39	45	3	34	8.5	42.5
32	46	48	42	48	3	34	8.5	42.5
33	47	49	42	48	3	34	8.5	42.5
35	49	51	44	50	3	34	8.5	42.5
38	54	58	49	56	4	36.5	8.5	45
40	56	60	51	58	4	36.5	8.5	45
43	59	63	54	61	4	36.5	8.5	45
45	61	65	56	63	4	36.5	8.5	45
48	64	68	59	66	4	36.5	8.5	45
50	66	70	62	70	4	36.5	11	47.5
53	69	73	65	73	4	36.5	11	47.5
55	71	75	67	75	4	36.5	11	47.5
58	78	83	70	78	4	41.5	11	52.5
60	80	85	72	80	4	41.5	11	52.5
63	83	88	75	83	4	41.5	11	52.5
65	85	90	77	85	4	41.5	11	52.5
68	88	93	81	90	4	41.5	11	52.5
70	90	95	83	92	4	49	11	60
75	99	104	88	97	4	49	11	60
80	104	109	95	105	4	46	14	60
85	109	114	100	110	4	46	14	60
90	114	119	105	115	4	51	14	65
95	119	124	110	120	4	51	14	65
100	124	129	115	125	4	51	14	65

:
 - (A,)
 - (U₃)
 - (Q₁, Q₂)
 - Al₂O₃ (V)
 :
 - , FKM (V)
 - (P)
 - , EPDM (E)
 - , FFKM (Kalrez®)
 - FEP

:
 - p=40
 - t=-50...220°C
 - v=20 /